

Page 1 of 91

Report No. RL/2015/40056

Huang

Ives

TEST REPORT IEC 60335-2-41

Safety of household and similar electrical appliances Part 2-41: Particular requirements for pumps

Report Reference No. RL/2015/40056

Compiled by (+ signature)...... Ives Huang

Approved by (+ signature)..... Felix Lin

Date of issue 29 July 2015

Total number of pages 91

Testing Laboratory name SGS Taiwan Ltd., Safety Laboratory

Address...... No. 33, Wu Chyuan Road, New Taipei Industrial Park, Wu Ku

District, New Taipei City, Taiwan

Applicant's name Crystaline Water Master Co., Ltd.

407, Taiwan (R.O.C.)

Test specification:

Standard IEC 60335-1:2001+A1:2004+A2:2006

IEC 60335-2-41:2002 + A1:2004 + A2:2009

Test procedure Compliance testing

Non-standard test

method....:

N/A

Test Report Form No. IEC60335 2 41H

Test Report Form(s) Originator...: Nemko AS, modified by SGS Taiwan

Master TRF 2006-10

Copyright © 2006 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 2 of 91

Report No. RL/2015/40056

Test item description	R.O. Water Purifier
Trade Mark:	
	2: ZEEVAK
Manufacturer	Crystaline Water Master Co., Ltd.
Model/Type reference:	CR-009, CR-001, CR-001B, CR-002, CR-003, CR-004, CR-005, CR-006, CR-007, CR-008, CR-008-1
Ratings:	Adaptor: Class II
	I/P: 220-240 V ~, 50-60 Hz, 0.2 A
	O/P: 24 Vdc, 1.2 A
	Filter pump: 24 V, 22 W, Class II, IPX4

Copy of marking plate and summary of test results (information/comments):

Equipment

CRYSTALINE IPX4 Model: CR-009 Rating: 24V === 22W MAX OPERATION TEMP: 55 MADE IN TAIWAN ZEEVAK IPX4 Model: CR-009 Rating: 24V === 22W MAX OPERATION TEMP: 55 MADE IN TAIWAN

Adaptor

ADAPTOR MODEL: D2412 GH INPUT: 220-240V ~50-60Hz,0.2A OUTPUT: 24V === 1200mA MADE IN TAIWAN

- After evaluation and testing, the water filter unit complies with the requirements of IEC 60335-1 and IEC 60335-2-41.
- 2. All tests are performed at models CR-009 is equipped with the filters and a pressure gauge that give rise to the maximum power input. All other models are installed with optional filters and with/without the pressure gauge.
- 3. Models CR-008 was subjected to input test.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 3 of 91

Report No. RL/2015/40056

Test item particulars: R.O. Water Purifier

Classification of installation and use Fixed appliance

Supply Connection: AC adapter

Possible test case verdicts:

- test case does not apply to the test object.........: N/A

- test object does meet the requirement P (Pass)

test object does not meet the requirement F (Fail)

Testing:

Date of receipt of test item 22 April 2015

General remarks:

General remarks

Details and test results are given in subsequent pages of this report.

This report refers only to the unit(s) submitted for test.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report. Throughout this report a point is used as the decimal separator.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_e-document.htm

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Page 4 of 91

General product information:

- 1. The appliances are RO systems for indoor use only. They are considered as Class II appliances. The power supply (power adaptor) is tested according to Annex G.
- 2. All models are similar to CR-009 except for adaptor and pump position (see photo documentation) and following differences.

Equipped Parts Model	Motor / adaptor	Pressure gauge	Number of filter	Type G mounting frame
Original model CR-009	D2412 GH / PM-07	No	6	No
CR-001	X	No	5	No
CR-001B	Х	No	5	No
CR-002	Not provided	No	5	No
CR-003	Х	No	5	No
CR-004	Х	No	5	Yes
CR-005	X	No	6	No
CR-006	X	No	6	No
CR-007	X	Yes	5	No
CR-008	Х	Yes	5	Yes
CR-008-1	Х	Yes	5	Yes

"X" means "the same as the original model".

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to

Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termination contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 5 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

5	GENERAL CONDITIONS FOR THE TESTS		1
26	Tests performed according to cl. 5, e.g. nature of supply, sequence of testing, etc.	CC	Р
5.7	Temperature of liquid maintained between 0 °C and –5 °C of temperature marked on pump (IEC 60335-2-41)		N/A
5.101	Pumps tested as portable appliances, unless (IEC 60335-2-41)		N/A
	they intended to be fixed (IEC 60335-2-41)		Р
5.102	Stationary pumps having a three-phase motor which does not incorporate a protective device installed with an appropriate device, in accordance with instructions (IEC 60335-2-41)		N/A

6	CLASSIFICATION		_
6.1	Protection against electric shock: Class I, II, III	Class II	Р
	Submersible pumps for use in swimming pools when persons in the pool be of class III with a rated voltage < 12 V (IEC 60335-2-41)		N/A
	Other submersible pumps for use in water and other conducting liquids be class I or class III. However (IEC 60335-2-41)		N/A
	aquarium pumps may be class II (IEC 60335-2-41)	a C	N/A
	Table fountain pumps for indoor use be class II as long as their rated power input ≤ 25 W (IEC 60335-2-41/A1)	Sui	N/A
	Portable pumps for cleaning and other maintenance of swimming pools be of class I or class III (IEC 60335-2-41)		N/A
	Other pumps be class I, class II or class III (IEC 60335-2-41)		Р
6.2	Submersible pumps be IPX8 (IEC 60335-2-41)		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 6 of 91

Report No. RL/2015/40056

IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict
aC	Portable pumps for cleaning and other maintenance of swimming pools at least IP X7 (IEC 60335-2-41)		N/A
65	Shower-boost pumps intended for installation outside of zones 1 and 2, as specified in IEC 60364-7-701, be at least IPX2 (IEC 60335-2-41/A1)	36	N/A
	Other pumps at least IPX4 (IEC 60335-2-41)	Pump	Р

7	MARKING AND INSTRUCTIONS		_
7.1	Rated voltage or voltage range (V)	24 Vdc (pump)	Р
	Single-phase appliances to be connected to the supply mains:	220-240 Vac (adaptor)	Р
	Multi-phase appliances to be connected to the supply mains:	C.F.	N/A
	Nature of supply		N/A
	Rated frequency (Hz)	50-60 (adaptor)	Р
	Rated power input (W)	22 (pump)	Р
	Rated current (A)	0.2 (adaptor)	Р
	Manufacturer's or responsible vendor's name, trademark or identification mark	1: CRYSTALINE 2: ZEEVAK	Р
C	Model or type reference	CR-009, CR-001, CR- 001B, CR-002, CR-003, CR-004, CR-005, CR-006, CR-007, CR-008, CR-008- 1	P
	Symbol 5172 of IEC 60417, for Class II appliances		Р
	IP number, other than IPX0	IPX4 (pump)	Р
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 7 of 91

Report No. RL/2015/40056

	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict		
-6	Pumps with rated power input exceeding 50 W n (IEC 60335-2-41):	narked with	-		
	- minimum total head in meters (m), if > 0 m (IEC 60335-2-41):	G	N/A		
	- maximum operating depth in metres (m), with a minimum of 1 m (for submersible pumps) (IEC 60335-2-41)		N/A		
	- direction of rotation (three-phase motor only) (IEC 60335-2-41)		N/A		
	Pumps marked with maximum liquid temperature (°C) which not less than 35 °C (IEC 60335-2-41)	55 °C	Р		
P	If temperature exceeds 35 °C, they marked with maximum period of operation, unless (IEC 60335-2-41)	- GE	N/A		
	they intended for continuous operation (IEC 60335-2-41)		Р		
7.2	Warning for stationary appliances for multiple supply		N/A		
	Warning placed in vicinity of terminal cover		N/A		
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		Р		
	Different rated values marked with the values separated by an oblique stroke		N/A		
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible	- CI	N/A		
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A		
	the power input is related to the arithmetic mean value of the rated voltage range		N/A		
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 8 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdic
7.6	Correct symbols used (IEC 60335-1/A1, IEC 60335-1/A2, IEC 60335-2-41)	Adaptor: ~ Pump: ===	Р
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply	SU	N/A
7.8	Except for type Z attachment, terminals for connindicated as follows:	ection to the supply mains	_
	- marking of terminals exclusively for the neutral conductor (N)		N/A
	- marking of protective earthing terminals (symbol 5019 of IEC 60417)		N/A
	- marking not placed on removable parts		N/A
7.9	Marking or placing of switches which may cause a hazard	ac.	N/A
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means	300	N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
7.11	Indication for direction of adjustment of controls		N/A
7.12	Instructions for safe use provided		Р
	The instructions state that:		_
36	- the appliance is not to be used by children or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction	GG.	P
	- children being supervised not to play with the appliance		Р
	Instructions for use of class I portable pumps for maintenance of swimming pools include substant (IEC 60335-2-41):		_
	- the pump must not be used when people are staying in the water (IEC 60335-2-41);		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 9 of 91

Report No. RI /2015/40056

	Page 9 of 91	Report No. RL/2	015/4005	
	IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict	
aC	- the pump must supplied through a residual current device (RCD) with a rated residual operating current ≤ 30 mA (IEC 60335-2-41)		N/A	
G E	The instructions for use for pumps marked with a temperature exceeding 35 °C state maximum period of operation and minimum rest period, unless (IEC 60335-2-41)	Sin	N/A	
	pump is intended for continuous operation at this temperature (IEC 60335-2-41)		Р	
7.12.1	Sufficient details for installation supplied		Р	
	Installation instruction provide information on requirements specified for electrical installation and include reference to national wiring rules (IEC 60335-2-41)		Р	
PE	If reference made to zones, corresponding be included (IEC 60335-2-41)	COS	P	
	Installation instructions state substance of follow	ing (IEC 60335-2-41):		
	- the maximum total head, in meters (for pumps with rated power input > 50 W) (IEC 60335-2-41);		N/A	
	- pollution of the liquid could occur due to leakage of lubricants (for submersible pumps and vertical wet pit pumps containing lubricants) (IEC 60335-2-41)		N/A	
C	- additional information for installation of stationary pumps having a three-phase motor not incorporating a protective device as specified (IEC 60335-2-41)	CC CC	N/A	
	Instructions for installation state that pumps for outdoor fountains, garden ponds and similar places have to be supplied through a RCD (operating current ≤ 30 mA) (IEC 60335-2-41)		N/A	
	Installation instructions for class I pumps for swimming pools shall state that the pump is to be supplied by an isolating transformer or supplied through a RCD (operating current ≤ 30 mA) (IEC 60335-2-41)		N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 10 of 91

Report No. RL/2015/40056

	Page 10 of 91	Report No. RL/20	13/400	
IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict	
PE	Installation instructions for class III pumps intended to be installed in zone 0 of a swimming pool state that the transformer is located outside zone 1 (IEC 60335-2-41)	- CGS	N/A	
	Installation instructions for class II pumps intended to be fixed in zone 1 of a swimming pool, or fixed close to a garden pond or similar place, state that the pump is to be located where flooding cannot occur (IEC 60335-2-41)		N/A	
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, instructions state that means for disconnection incorporated in fixed wiring in accordance with wiring rules		N/A	
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions stating that the fixed wiring must be protected	366	N/A	
7.12.4	Instructions for built-in appliances:		_	
	- dimensions of space		N/A	
	- dimensions and position of supporting means		N/A	
	- distances between parts and surrounding structure		N/A	
06	- dimensions of ventilation openings and arrangement	- CG	N/A	
	- connection to supply mains and interconnection of separate components		N/A	
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A	
	a switch complying with 24.3		N/A	
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 11 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	Replacement cord instructions, type Y attachment		N/A
	Replacement cord instructions, type Z attachment	a Class	N/A
7.12.6	Caution in the instructions for heating appliances with a non-self-resetting thermal cut-out		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		Р
7.12.8	Instructions for appliances connected to the water	er mains:	_
	- max. inlet water pressure (Pa):	206850	Р
	- min. inlet water pressure, if necessary (Pa):		N/A
PE	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets	CE	N/A
7.13	Instructions and other texts in an official language	English	Р
7.14	Marking clearly legible and durable		Р
7.15	Marking on a main part		Р
	Marking clearly discernible from the outside, if necessary after removal of a cover		Р
	For portable appliances, cover can be removed or opened without a tool		N/A
C	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation	CG.	N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		Р
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 12 of 91

Report No. RL/2015/40056

N/A

Р

N/A

N/A

N/A

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link	-00	N/A
8	PROTECTION AGAINST ACCESS TO LIVE PA	ARTS	<u> </u>
8.1	Adequate protection against accidental contact with live parts		Р
8.1.1	Requirement applies for all positions, detachable parts removed		Р
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032: no contact with live parts		Р
8.1.2	Use of test probe 13 of IEC 61032 through openings in class 0 appliances and class II appliances/ constructions: no contact with live parts	SG	Р
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N/A
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032: no contact with live parts of visible glowing heating elements		N/A
8.1.4	Accessible part not considered live if:	•	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

- safety extra-low a.c. voltage: peak value not

- safety extra-low d.c. voltage: not exceeding

- or separated from live parts by protective

If protective impedance: d.c. current not

a.c. peak value not exceeding 0.7 mA

exceeding 42.4 V

exceeding 2 mA, and

impedance

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termination contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號

Transformer output: 24 Vdc



Page 13 of 91

Report No. RL/2015/40056

IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict
aC	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 μF	-09	N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 μC	Si	N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation bassembly:	efore installation or	_
	- built-in appliances		N/A
	- fixed appliances		Р
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only	SGS	P
	Only possible to touch parts separated from live parts by double or reinforced insulation		Р

10	POWER INPUT AND CURRENT		_
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1		Р
C	Test for an appliance with one or more rated voltage ranges	- CFR	N/A
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2		Р
	Test for an appliance with one or more rated voltage ranges		N/A

11	HEATING	_
11.1	No excessive temperatures in normal use	Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 14 of 91

Report No. RL/2015/40056

	Page 14 of 91	Report No. RL	/2015/4005		
	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict		
11.2	Placing and mounting of appliance as described		Р		
11.3	Temperature rises, other than of windings, determined by thermocouples	a C	Р		
	Temperature rises of windings determined by resistance method, unless	1 20	Р		
	the windings makes it difficult to make the necessary connections		N/A		
11.4	Heating appliances operated under normal operation at 1.15 times rated power input:		N/A		
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage:	206.8 Vac, 254.4 Vac	Р		
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage:	CC	N/A		
11.7	Pumps are operated until steady conditions are established (IEC 60335-2-41/A1)	20	Р		
	They operated until steady conditions established unless (IEC 60335-2-41/A1)		N/A		
	they marked with a maximum period of operation. In this case, they operated for marked period followed by the rest period specified in instructions, test carried out for three cycles of operation (IEC 60335-2-41/A1)		N/A		
0	Shower-boost pumps also supplied with cold water operated with cold water at 15 °C ± 2 °C (IEC 60335-2-41/A1)	a C	N/A		
	Pumps, other than shower-boost pumps, marked with a maximum period of operation are also operated with liquid maintained at 35 °C until steady conditions established (IEC 60335-2-41/A1)		N/A		
11.8	Temperature rises not exceeding values in table 3	(see appended tables)	Р		
	Sealing compound does not flow out		Р		
	Protective devices do not operate, except		Р		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 15 of 91

Report No. RL/2015/40056

IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict	
aC	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A	
515	Pumps marked with liquid temperature > 35 °C, temperature rise of external enclosure not measured (IEC 60335-2-41)		N/A	

13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		_
13.1	Leakage current not excessive and electric strength adequate	Powered by adaptor	Р
	Heating appliances operated at 1.15 times rated power input		N/A
00	Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage:	254.4 Vac	Р
	Protective impedance and radio interference filters disconnected before carrying out the tests	Not provide such device	N/A
13.2	Leakage current measured by means of the circuit described in figure 4 of IEC 60990		Р
	Leakage current measurements	(see appended table)	Р
13.3	The appliance is disconnected from the supply		Р
	Electric strength tests according to table 4	(see appended table)	Р
	No breakdown during the tests		Р

14	TRANSIENT OVERVOLTAGES		_
16	Appliances withstand the transient overvoltages to which they may be subjected	Si	N/A
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6	(see appended table)	N/A
	No flashover during the test, unless of functional insulation		N/A
	In case of flashover of functional insulation, the appliance complies with clause 19 with the clearance short circuited		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 16 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

MOISTURE RESISTANCE		_
Enclosure provides the degree of moisture protection according to classification of the appliance	CG:	N/A
Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N/A
No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in clause 29		N/A
Appliances, other than IPX0, subjected to tests as specified in IEC 60529:	IPX4	Р
Water valves in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances	CGS	N/A
Shower-boost pumps subjected to appropriate test of IEC 60529 both at rest and in operation while supplied at rated voltage (IEC 60335-2-41)		N/A
Hand-held appliance turned continuously through the most unfavourable positions during the test		N/A
Built-in appliances installed according to the instructions		N/A
Appliances placed or used on the floor or table placed on a horizontal unperforated support	-66	Р
Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board	Spi	N/A
For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube	For pump	Р
	Enclosure provides the degree of moisture protection according to classification of the appliance Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3 No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in clause 29 Appliances, other than IPX0, subjected to tests as specified in IEC 60529: Water valves in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances Shower-boost pumps subjected to appropriate test of IEC 60529 both at rest and in operation while supplied at rated voltage (IEC 60335-2-41) Hand-held appliance turned continuously through the most unfavourable positions during the test Built-in appliances installed according to the instructions Appliances placed or used on the floor or table placed on a horizontal unperforated support Appliances normally fixed to a wall and appliances with pins for insertion into socketoutlets are mounted on a wooden board For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of	Enclosure provides the degree of moisture protection according to classification of the appliance Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3 No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in clause 29 Appliances, other than IPX0, subjected to tests as specified in IEC 60529: Water valves in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances Shower-boost pumps subjected to appropriate test of IEC 60529 both at rest and in operation while supplied at rated voltage (IEC 60335-2-41) Hand-held appliance turned continuously through the most unfavourable positions during the test Built-in appliances installed according to the instructions Appliances placed or used on the floor or table placed on a horizontal unperforated support Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 17 of 91

Report No. RL/2015/40056

	Page 17 of 91	Report No. RL	/2013/4003		
	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict		
GG	However, for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube	GG.	P		
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support		N/A		
	For IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		Р		
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N/A		
P	Appliances with type X attachment fitted with a flexible cord as described		N/A		
	Detachable parts tested as specified		N/A		
	IPX4 pumps tested as specified (IEC 60335-2-41)		Р		
	Submersible pumps immersed for 24 h in water as specified (IEC 60335-2-41)		N/A		
	Water pressure on enclosure (IEC 60335-2-41):				
	- 1,5 times pressure occurring at maximum operation depth, when this depth ≤ 10 m (IEC 60335-2-41)		N/A		
	- 1,3 times pressure occurring at maximum operating depth, or (IEC 60335-2-41)	C(G)	N/A		
	15 m, if higher (IEC 60335-2-41)		N/A		
15.2	Spillage of liquid does not affect the electrical insulation	Not subject to spillage of water during normal operation	N/A		
	Appliances with type X attachment fitted with a flexible cord as described		N/A		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 18 of 91

Report No. RL/2015/40056

	1 age 10 of 51	Report No. IXE	, 2010, 1000
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
aC	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N/A
190	Detachable parts removed	46	N/A
	Overfilling test with additional amount of water, over a period of 1 min (I):		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances and creepage distances below values specified in clause 29		N/A
15.3	Appliances proof against humid conditions	RH: 93 %, 25 °C, 48 h	Р
00	Humidity test for 48 h in a humidity cabinet (not for submersible pumps) (IEC 60335-2-41)	-00	Р
	The appliance withstands the tests of clause 16	see appended table	Р

16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		_
16.1	Leakage current not excessive and electric strength adequate	Powered by power supply	Р
	Protective impedance disconnected from live parts before carrying out the tests		Р
16.2	Single-phase appliances: test voltage 1.06 times rated voltage:	254.4 Vac	Р
	Three-phase appliances: test voltage 1.06 times rated voltage divided by √3:	00	N/A
TE	Leakage current measurements	(see appended table)	Р
16.3	Electric strength tests according to table 7	(see appended table)	Р
	No breakdown during the tests		Р

17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS	
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use	Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 19 of 91

Report No. RL/2015/40056

	Page 19 of 91	Report No. RL/2	2015/400
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
C	Appliance supplied with 1.06 or 0.94 times rated voltage and the most unfavourable short-circuit or overload likely to occur in normal use applied:	254.4 Vac	P
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		Р
	Temperature of the winding not exceeding the value specified in table 8,		Р
	however limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
18	ENDURANCE		-
(GE	Requirements and tests are specified in part 2 when necessary	200	N/A
19	ABNORMAL OPERATION		_
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated		Р
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe		Р
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Pumps also subjected to tests of clause 19.101 and 19.102 (IEC 60335-2-41)	C C C C	Р
19.2	Test of appliance with heating elements with restricted heat dissipation; test voltage (V): power input of 0.85 times rated power input:		N/A
19.3	Test of 19.2 repeated; test voltage (V): power input of 1.24 times rated power input		N/A
19.4	Test conditions as in cl. 11, any control limiting the temperature during tests of cl. 11 short-circuited		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 20 of 91

Report No. RI /2015/40056

		Page 20 of 91	Report N	o. RL/2015/40056
	IE	C 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict
19.5	Test of 19.4 repeated on Class (appliances with tubular sheather heating elements. No short-circuend of the element connected to sheath	d or embedded liting, but one	G	N/A
	The test repeated with reversed other end of the heating elementhe sheath			N/A
	The test is not carried out on applintended to be permanently conwiring and on appliances where disconnection occurs during the	nected to fixed an all-pole		N/A
19.6	Appliances with PTC heating elerated voltage, establishing stead			N/A
GE	The working voltage of the PTC element is increased by 5% and is operated until steady condition established. The voltage is then similar steps until 1.5 times work until the PTC heating element ru	the appliance ns are re- increased in ting voltage or	39	N/A
19.7	Stalling test by locking the rotor rotor torque is smaller than the for locking moving parts of other	ull load torque		Р
	Locked rotor, motor capacitors of short-circuited, if required	pen-circuited or		N/A
	Locked rotor, capacitors open-ci time	rcuited one at a		N/A
0	Test repeated with capacitors shone at a time, if required	ort-circuited	00	N/A
	Appliances with timer or program with rated voltage for each of the period equal to the maximum period equal to th	e tests, for a	3)	N/A
	Other appliances supplied with raperiod as specified	ated voltage for		N/A
	Winding temperatures not excees specified in table 8	eding values		Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 21 of 91

Report No. RI /2015/40056

	Page 21 of 9	P1 Report No	o. RL/2015/4005
	IEC 60335-2-	41	
Clause	Requirement + Test	Result - Remark	Verdict
19.8	Three-phase motors operated at rated volta with one phase disconnected	age	N/A
19.9	Running overload test on appliances incorporating motors intended to be remote automatically controlled or liable to be oper continuously		N/A
	Winding temperatures not exceeding value specified	es as	N/A
19.10	Series motor operated at 1.3 times rated voltage for 1 min		N/A
	During the test, parts not being ejected from appliance	n the	N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified 19.11.2 for all circuits or parts of circuits, up they comply with the conditions specified in 19.11.1	nless	P
	Appliances incorporating a protective elect circuit subjected to the tests of 19.11.3 and 19.11.4		N/A
	Appliances having a switch with an off posiobtained by electronic disconnection, or a switch placing the appliance in a stand-by mode, subjected to the tests of 19.11.4	ition	N/A
	Appliances incorporating an electronic circulative relies upon a programmable compone function correctly, subjected to the test of 19.11.4.8		N/A
19.11.1	Before applying the fault conditions a) to f) or parts of circuit meet both of the following		cuits
	the electronic circuit is a low-power circuit is, the maximum power at low-power points does not exceed 15 W according to the tes specified	S	N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of the appliance not rely on the correct functioning of the electronic circuit	does	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 22 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
19.11.2	Fault conditions applied one at a time, the appliance operated under conditions specified in cl. 11, but supplied at rated voltage, the duration of the tests as specified:		-
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in 29	36	N/A
	b) open circuit at the terminals of any component		N/A
	c) short circuit of capacitors, unless they comply with IEC 60384-14		N/A
	d) short circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition is not applied between the two circuits of an optocoupler	Diode short-circuited (for adaptor)	Р
	e) failure of triacs in the diode mode		N/A
196	f) failure of an integrated circuit	(46)	N/A
	g) failure of an electronic power switching device		N/A
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to f) of 19.11.2		N/A
	During and after each test the following is checke	ed:	_
	- the temperature rise of the windings do not exceed the values specified in table 8		N/A
	- the appliance complies with the conditions specified in 19.13	COL	N/A
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open- considered to have withstood the particular test, following conditions are met:		_
	- the material of the printed circuit board withstands the burning test of annex E		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 23 of 91

Report No. RL/2015/40056

	Page 23 of 91	Report No. RL/2015/40
	IEC 60335-2-41	
Clause	Requirement + Test	Result - Remark Verd
es.	- any loosened conductor does not reduce the clearances or creepage distances between live parts and accessible metal parts below the values specified in cl. 29	N/A
	- the appliance withstands the tests of 19.11.2 with open-circuited conductor bridged	N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or	N/A
	a device that can be placed in the stand-by mode,	N/A
	subjected to the tests of 19.11.4.1 to 19.11.4.7	N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, except that	N/A
CE	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.	N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4	N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3	N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified	N/A
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified	N/A
761	Earthed heating elements in class I appliances disconnected	N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3	N/A
19.11.4.6	The appliance is subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 24 of 91

Report No. RI /2015/40056

	Page 24 of 91	Report No. RL/2	2015/4005
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2	-00	N/A
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduces to a level such that the appliance ceases to respond or a programmable component cease to operate.	Str	N/A
	The appliance continues to operate normally or requires a manual operation to restart		N/A
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A)	CCS	N/A
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		Р
	Temperature rises not exceeding the values shown in table 9	(see appended table)	Р
	Compliance with cl. 8 not impaired		N/A
	If the appliance can still be operated it complies with 20.2		N/A
	Insulation, other than of class III appliance, withs of 16.3, the test voltage specified in table 4:	tand the electric strength test	_
AL	- basic insulation:	1000	Р
	- supplementary insulation:	1750	Р
	- reinforced insulation:	3000	Р
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstanding the electric strength test of 16.3. the test voltage being twice the working voltage		N/A
	The appliance does not undergo a dangerous malfunction, and		N/A
		l	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 25 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	no failure of protective electronic circuits, if the appliance is still operable		N/A
1	Appliances tested with an electronic switch in the by mode:	e off position, or in the stand-	3)
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
19.14	Appliances operated under the conditions of Clause 11. Contactors or relays contacts operating under the conditions of clause 11 short-circuited		N/A
19.101	Pump supplied at rated voltage and operated at approximately half at maximum total head for 5 min (IEC 60335-2-41),	acce.	Р
EL	after which inlet is removed from liquid and operation continued for 7 h (IEC 60335-2-41)	201	Р
	Pumps operated again for 5 min at approximately half maximum total head (IEC 60335-2-41)		Р
	If the pump becomes inoperable during test, it is disconnected from supply and filled with water (IEC 60335-2-41)		N/A
19.102	Pumps marked with maximum period of operation supplied at rated voltage and operated under normal operation until steady conditions established		Р

20	STABILITY AND MECHANICAL HAZARDS		_
20.1	Adequate stability	Fixed appliance	N/A
	Tilting test through an angle of 10° (appliance placed on an inclined plane/horizontal plane); appliance does not overturn		N/A
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 26 of 91

Report No. RL/2015/40056

	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict		
aC	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9	-00	N/A		
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury	Moving parts are enclosed	Р		
	Protective enclosures, guards and similar parts are non-detachable		Р		
	Adequate mechanical strength and fixing of protective enclosures		Р		
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard, by unexpected reclosure		N/A		
	Not possible to touch dangerous moving parts with test probe		Р		

21	MECHANICAL STRENGTH		_
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		Р
	Checked by applying blows to the appliance in accordance with test Ehb of IEC 60068-2-75, spring hammer test, impact energy 0,5 J		Р
	Pumps, other than shower-boost pumps, impact energy is increased to 1,0 J (IEC 60335-2-41/A1)		N/A
C	If necessary, supplementary or reinforced insulation subjected to the electric strength test of 16.3	No cracking	N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		Р
	The insulation is tested as specified, unless		Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 27 of 91

Report No. RL/2015/40056

IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict	
ac	the thickness of supplementary insulation is at least 1 mm and reinforced insulation is at least 2 mm		N//A	

22	CONSTRUCTION		_
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled	IPX4	Р
22.2	Stationary appliance: means to provide all-pole of provided, the following means being available:	disconnection from the supply	_
	- a supply cord fitted with a plug		Р
	- a switch complying with 24.3		N/A
e C	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided	CCC	N/A
	- an appliance inlet		N/A
	Singe-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets	No pins	N/A
	Applied torque not exceeding 0.25 Nm		N/A
C	Pull force of 50N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm	C C C	N/A
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating unless rotating does not impair compliance with the standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets	Not such device	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to

Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 28 of 91

Report No. RI /2015/40056

		Page 28 of 91 Report No. RL/201		o. RL/2015/40056
		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict
22.5	No risk of electric shock of the plug, for appliance with rated capacitance e appliance being disconn at the instant of voltage	es having a capacitor xceeding 0,1µF, the ected from the supply		N/A
22.6	Electrical insulation not a water or leaking liquid	affected by condensing		N/A
	Electrical insulation of C affected in case of a hos			Р
	Class II pumps seal is re Pump is supplied at rate for 10 min with maximum 60335-2-41)	d voltage and operated		N/A
CC	If static pressure can occupressure corresponding (IEC 60335-2-41)		-CC	N/A
101	Pump withstand electric clause 16.3 (IEC 60335-			N/A
	Shower-boost pumps wi have a drain hole in enci- that water can drain out electrical insulation, unle accumulate within enclo- 60335-2-41)	losure positioned so without impairing ess water cannot		N/A
	Hole be at least 5 mm in 60335-2-41)	diameter or (IEC		N/A
0	20 mm² in area with a wi 60335-2-41)	idth of least 3 mm (IEC	60	N/A
22.7	Adequate safeguards age excessive pressure in age steam-producing devices	ppliances provided with	3)	N/A
22.8	Electrical connections no during cleaning of compa access can be gained w and that are likely to be	artments to which ithout the aid of a tool,		N/A
22.9	Insulation, internal wiring commutators and slip rir grease or similar substa	igs not exposed to oil,		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 29 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	Adequate insulating properties of oil or grease to which insulation is exposed	-6	N/A
22.10	Not possible to reset voltage-maintained non- self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance	SG	N/A
	Non-self resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Location or protection of reset buttons of non- self-resetting controls is so that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts	CGG	Р
) a r	Obvious locked position of snap-in devices used for fixing such parts	3)5	N/A
	No deterioration of the fixing properties of snap- in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described		Р
22.12	Handles, knobs etc. fixed in a reliable manner	Fixed appliance	N/A
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		N/A
C	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied	SE	N/A
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operators hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 30 of 91

Report No. RL/2015/40056

	Page 30 of 91	Report No. RL/	2015/4005	
IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict	
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance	-69	Р	
1015	No exposed pointed ends of self tapping screws etc., liable to be touched by the user in normal use or during user maintenance	850	P	
22.15	Storage hooks and the like for flexible cords smooth and well rounded	Not such device	N/A	
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands, no undue wear of contacts		N/A	
	Cord reel tested with 6000 operations, as specified		N/A	
	Electric strength test of 16.3, voltage of 1000 V applied		N/A	
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner	3)	N/A	
22.18	Current-carrying parts and other metal parts resistant to corrosion under normal conditions of use		N/A	
22.19	Driving belts not used as electrical insulation	Not such device	N/A	
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless material used is non-corrosive, non-hygroscopic and non-combustible		N/A	
C	Compliance is checked by inspection and, if necessary, by appropriate test	CG	N/A	
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless impregnated	Not provided as insulation	Р	
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A	
22.22	Appliances not containing asbestos		Р	
22.23	Oils containing polychlorinated biphenyl (PCB) not used	No oils	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 31 of 91

Report No. RL/2015/40056

	Page 31 of 91	Report No. RL/2	2015/4005
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
22.24	Bare heating elements adequately supported		N/A
PE	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts	CA	N/A
22.25	Sagging heating conductors cannot come into contact with accessible metal parts	Not such device	N/A
22.26	The insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		Р
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water: separated from live parts by double or reinforced insulation	- CCC	Р
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		Р
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		N/A
22.31	Clearances and creepage distances over supplementary and reinforced insulation not reduced below values specified in clause 29 as a result of wear	SE	P
	Clearances and creepage distances between live parts and accessible parts not reduced below values for supplementary insulation, if wires, screws etc. become loose		Р
22.32	Supplementary and reinforced insulation designed or protected against deposition of dirt or dust		N/A
		· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 32 of 91

Report No. RL/2015/40056

	IEC 60335-2-41			
Clause	Requirement + Test		Result - Remark	Verdict
CC	Supplementary insulation rubber resistant to ageing dimensioned so that creating not reduced below values.	ng, or arranged and epage distances are		N/A
	Ceramic material not tig material or beads alone supplementary or reinfo	not used as	3)	N/A
	Oxygen bomb test at 70 room temperature	°C for 96 h and 16 h at		N/A
	Insulating material in whare embedded is consider insulation and not reinfo	ered to be basic		N/A
22.33	Conductive liquids that a accessible in normal use contact with live parts			N/A
	Electrodes not used for	heating liquids		N/A
	For class II construction that are or may become use, not in direct contac reinforced insulation	accessible in normal	3)	N/A
	For class II construction which are in contact with contact with reinforced in	n live parts, not in direct		N/A
22.34	Shafts of operating known not live, unless the shaft the part is removed			N/A
22.35	Handles, levers and kno normal use, not becoming failure of basic insulation	ng live in the event of a	cf	N/A
	Such parts being of met fixings are likely to beco failure of basic insulation covered by insulation maccessible parts are sep or fixings by supplement	me live in the event of a n, are either adequately aterial or their parated from their shafts		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 33 of 91

Report No. RL/2015/40056

IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict
GE	This requirement does not apply to handles, levers and knobs on stationary appliances oth than those of electrical components, provided they are either reliably connected to an earthin terminal or earthing contact, or separated from live parts by earthed metal	ng	N/A
22.36	Handles continuously held in the hand in normal use are so constructed that when gripped as in normal use, the operators hand not likely to touch metal parts, unless they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in Class II appliances not connecte to accessible metal parts, unless complying with 22.42	ed	N/A
E	Metal casings of capacitors in Class II appliances separated from accessible metal parts by supplementary insulation, unless complying with 22.42	S	N/A
22.38	Capacitors not connected between the contact of a thermal cut-out	ets	N/A
22.39	Lamp holders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	Unless the appliance can operate continuousl automatically or remotely without giving rise to a hazard, appliances for remote operation bei fitted with a switch. The actuating member of the switch being easily visible and accessible.	ng	N/A
	Requirement not applicable to submersible pumps and vertical wet pit pumps (IEC 60335-2-41)		N/A
22.41	No components, other than lamps, containing mercury		Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 34 of 91

Report No. RL/2015/40056

	Page 34 of 91	Report No. RL/2015/2	+000
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark Ver	dict
22.42	Protective impedance consisting of at least two separate components	N/	/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited	N _i	/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur	N	/A
22.44	Appliances shall not have an enclosure that is shaped or decorated like a toy	F)
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.4 due to deformation as a result of an external force applied to the enclosure	N/	/A
22.46	Software used in protective electronic circuits is software class B or C	N/	/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use	F)
	No leakage from any part, including any inlet water hose	F)
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water	N/	/A
22.49	For remote operation, the duration of operation shall be set before the appliance can be started, unless	N/	/A
	the appliance switches off automatically or can operate continuously without hazard	N	/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation	N/	/A
22.51	A control on the appliance being manually adjusted to the setting for remote operation before the appliance can be operated in this mode	N/	/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 35 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	Manual setting and visual indication not necessary operate as follows, without giving rise to a hazard		9
	- operate continuously,		N/A
	- operate automatically, or		N/A
	- be operated remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold	Not such device	N/A
22.101	Pumps withstand the static pressure occurring in normal use (IEC 60335-2-41)		Р
G	Pump filled with water, ensuring that all air is removed. Pressure raised hydraulically to 1,2 times pressure occurring at maximum total head and maintained for 1 min (submersible pumps and vertical wet pit pumps not subjected to this test) (IEC 60335-2-41)	SG	Р
	No trace of water on insulation that could result in a reduction of clearances and creepage distances below values specified in clause 29 (IEC 60335-2-41)		Р
22.102	Material of pump not be affected by liquid for which pump is intended if a hazard could result (IEC 60335-2-41)		Р
22.103	Submersible pumps and vertical wet pit pumps so constructed that pollution of liquid by lubricants prevented as far as possible (IEC 60335-2-41)	30	N/A
22.104	Submersible pumps and vertical wet pit pumps having a mass > 3 kg so constructed that means for hoisting can be attached (IEC 60335-2-41)		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 36 of 91

Report No. RL/2015/40056

	. ago 30 31 31	-1			
	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark Verdict			
22.105	Class I submersible pumps with plastic enclosure so constructed that leakage of liquid into motor does not result in a hazard (IEC 60335-2-41)	N/A			
	After specified test accumulating water come in contact with earthed metal before it reaches live parts (IEC 60335-2-41)	N/A			
22.106	Shower-boost pumps constructed so that they can be permanently connected to water supply (IEC 60335-2-41)	N/A			
	Shower-boost pumps for wall mounting constructed so that they can be securely fixed independently of connection to water supply (IEC 60335-2-41)	N/A			

23	INTERNAL WIRING	ad FC	_
23.1	Wireways smooth and free from sharp edges		Р
	Wires protected against contact with burrs, cooling fins etc.		Р
	Wire holes in metal well rounded or provided with bushings		N/A
	Wiring effectively prevented from coming into contact with moving parts	No moving parts	N/A
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges or corners	Not such device	N/A
16	Beads inside flexible metal conduits contained within an insulating sleeve	SU	N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		N/A
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 37 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
aC	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use or 100 flexings for conductors flexed during user maintenance	(5)	N/A
	Electric strength test, 1000 V between live parts and accessible metal parts		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	The insulation of internal wiring withstanding the electrical stress likely to occur in normal use		Р
	No breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		Р
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by positive means	Si	P
23.7	The colour combination green/yellow used only for earthing conductors	Class II appliance	N/A
23.8	Aluminium wires not used for internal wiring		Р
23.9	No lead-tin soldering of stranded conductors where they are subject to contact pressure, unless		Р
	clamping means so constructed that there is no risk of bad contact due to cold flow of the solder		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)	SE	N/A

24	COMPONENTS		_
24.1	Components comply with safety requirements in relevant IEC standards		Р
	List of components	(see appended table)	Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 38 of 91

Report No. RL/2015/40056

	Page 38 of 91	Report No. RL	2015/4005
IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict
CC	Components not tested and found to comply with relevant IEC standard for the number of cycles specified are tested in accordance with 24.1.1 to 24.1.9	-cG	N/A
	Components not tested and found to comply with relevant IEC standard, components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		N/A
	Lampholders and starterholders not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14, or	SG	N/A
	tested according to annex F		N/A
24.1.2	Safety isolating transformers complying with IEC 61558-2-6, or		N/A
	tested according to annex G		Р
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000, or		N/A
	tested according to annex H		N/A
	Level switches subjected to 50 000 cycles of operation (IEC 60335-2-41)	C(fi	N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
24.1.4	Automatic controls complying with IEC 60730-1 number of cycles of operation being:	with relevant part 2. The	_
	- thermostats: 10 00 0		N/A
	- temperature limiters: 1 000		N/A
		•	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 39 of 91

Report No. RL/2015/40056

Page 39 of 91	Report No. RL/2015/400
IEC 60335-2-41	
Requirement + Test	Result - Remark Verdic
- self-resetting thermal cut-outs: 300	N/A
- voltage maintained non-self-resetting 1000 thermal cut-outs:	N/A
- other non-self-resetting thermal cut- outs:	N/A
- timers: 3 000	N/A
- energy regulators: 10 000	N/A
Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D	N/A
For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7	N/A
Appliance couplers complying with IEC 60320-1	N/A
However, appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3	N/A
Interconnection couplers complying with IEC 60320-2-2	N/A
Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable	N/A
If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151	Not such device N/A
The relevant standard for thermal links is IEC 60691. Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19	N/A
Relays, other than motor starting relays, tested as part of the appliance	N/A
	Requirement + Test - self-resetting thermal cut-outs: 300 - voltage maintained non-self-resetting thermal cut-outs: - other non-self-resetting thermal cut-outs: - other non-self-resetting thermal cut-outs: - timers: 3 000 - energy regulators: 10 000 Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7 Appliance couplers complying with IEC 60320-1 However, appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3 Interconnection couplers complying with IEC 60320-2-2 Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151 The relevant standard for thermal links is IEC 60691. Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19 Relays, other than motor starting relays, tested

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 40 of 91

Report No. RL/2015/40056

	Page 40 of 91	Report No. RL/2015/4005		
IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark Verdict		
e G	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of operations in 24.1.4 selected according to the relay function in the appliance	N/A		
24.2	No switches or automatic controls in flexible cords	N/A		
	No devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance	N/A		
	No thermal cut-outs that can be reset by soldering	N/A		
	Level switches incorporated in interconnection cords (IEC 60335-2-41)	N/A		
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and having a contact separation in all poles, providing full disconnection under overvoltage category III conditions	N/A		
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1	N/A		
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance and used accordingly	N/A		
36	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load	N/A		
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42V	N/A		
	In addition, the motors are complying with the requirements of Annex I	N/A		
		. ,		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 41 of 91

Report No. RL/2015/40056

IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict
24.7	Hose-sets for connection of appliances to the water mains, complying with IEC 61770 and supplied with the appliance		N/A

25	SUPPLY CONNECTION AND EXTERNAL FLE	XIBLE CORDS	_
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		_
	- supply cord fitted with a plug	For adaptor	Р
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance		N/A
	- pins for insertion into socket-outlets		N/A
CS	Submersible pumps, other than class III, provided with a supply cord fitted with a plug (IEC 60335-2-41)	CCS	N/A
25.2	Appliance not provided with more than one means of connection to the supply mains	2)6	N/A
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Connection of supply conductors for appliance intended to be permanently connected to fixed wiring possible after the appliance has been fixed to its support		N/A
P	Appliance provided with a set of terminals for the connection of cables or fixed wiring, cross-sectional areas specified in 26.6	CE	N/A
	Appliance provided with a set of terminals allowing the connection of a flexible cord		N/A
	Appliance provided with a set of supply leads accommodated in a suitable compartment		N/A
	Appliance provided with a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate type of cable or conduit		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 42 of 91

Report No. RL/2015/40056

	IEC 60335-2-41	·	
Requirement + Test	1LC 00333-2-41	Result - Remark	Verdict
			N/A
		SG	N/A
			N/A
Method for assemble supply	cord with the applia	nce:	_
			N/A
- type Y attachment			Р
		-00	N/A
-type Z attachment pumps for (IEC 60335-2-41)	or garden ponds	Sui	N/A
			N/A
Plugs fitted with only one flex	ible cord	For adaptor	Р
			_
			N/A
		For adaptor	Р
			_
synthetic elastomer and not li polychloroprene sheathed co	ighter than heavy rd (code		N/A
	Submersible pumps, other the provided with a flexible cord (Cable and conduit entries, rate appliance not exceeding 16 A according to table 10 Introduction of conduit or cabe clearances or creepage distate specified in 29 Method for assemble supply -type X attachment (not allow submersible pumps) (IEC 600 - type Y attachment for pump power input ≤ 100 W (IEC 600 -type Z attachment pumps for (IEC 60335-2-41) Type X attachment pumps for (IEC 60335-2-41) Type X attachment, other that specially prepared cord, not used to cords Plugs fitted with only one flext Supply cords of single-phase exceeding 16 A, fitted with a sheets of IEC 60083:1975: - for Class I appliances: stand C3b or C4	Submersible pumps, other than class III pumps, provided with a flexible cord (IEC 60335-2-41) Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in 29 Method for assemble supply cord with the applia -type X attachment (not allowed for submersible pumps) (IEC 60335-2-41) - type Y attachment type Z attachment for pumps having a rated power input ≤ 100 W (IEC 60335-2-41) -type Z attachment pumps for garden ponds (IEC 60335-2-41) Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords Plugs fitted with only one flexible cord Supply cords of single-phase portable appliances exceeding 16 A, fitted with a plug complying with sheets of IEC 60083:1975: - for Class I appliances: standard sheet C2b, C3b or C4 - for Class II appliances: standard sheet C5 or C6	Requirement + Test Submersible pumps, other than class III pumps, provided with a flexible cord (IEC 60335-2-41) Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in 29 Method for assemble supply cord with the appliance: -type X attachment (not allowed for submersible pumps) (IEC 60335-2-41) - type Y attachment type Z attachment for pumps having a rated power input ≤ 100 W (IEC 60335-2-41) -type Z attachment pumps for garden ponds (IEC 60335-2-41) Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords Plugs fitted with only one flexible cord Supply cords of single-phase portable appliances having a rated current not exceeding 16 A, fitted with a plug complying with the following standard sheets of IEC 60083:1975: - for Class II appliances: standard sheet C2b, C3b or C4 - for Class II appliances: standard sheet C5 or C6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 43 of 91

Report No. RL/2015/40056

	IEC 60335-2-41	· · · · · · · · · · · · · · · · · · ·	
Clause	Requirement + Test	Result - Remark	Verdic
GE	fixed pumps having a rated power input ≤ 1 kW and portable pumps having a mass ≤ 5 kg fitted with ordinary polychloroprene sheathed cord (code designation 60245 IEC 57) (IEC 60335-2-41)	GG.	N/A
	Pumps intended for indoor use, except table fou pumps, shower-boost pumps and class III pump (IEC 60335-2-41/A1):		
	- polychloroprene sheathed or equivalent synthetic elastomer and not be lighter than ordinary polychloroprene sheathed cord (code designation 60245 IEC 57) (IEC 60335-2-41)		N/A
	Supply cords being one of the following types:		1
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)	- CO	N/A
	- ordinary polychloroprene sheathed flexible cord (60245 IEC 57)		N/A
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 87)		N/A
	Polyvinyl chloride sheathed: Not used if they are likely to touch metal parts hat exceeding 75K during the test of Clause 11.	aving a temperature rise	_
	- light polyvinyl chloride sheathed cord (at least 60227 IEC 52), appliances not exceeding 3 kg	For adaptor H03VV-F	Р
0	- ordinary polyvinyl chloride sheathed cord (at least 60227 IEC 53), other appliances	-CG	N/A
	Heat resistant polyvinyl chloride sheathed: Not used for type X attachment other than speci	ally prepared cords.	
	 Heat-resistant light polyvinyl chloride sheathed cord (at least 60227 IEC 56), appliances not exceeding 3 kg 		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 44 of 91

Report No. RL/2015/40056

IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict
	- heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), other appliances		N/A
	Supply cords having high flexibility, not lighter the	nan:	5)-
	- rubber insulated and sheathed cord (60245 IEC 86)		N/A
	- rubber insulated, crosslinked PVC sheathed cord (60245 IEC 87)		N/A
	- crosslinked PVC insulated and sheathed cord (60245 IEC 88)		N/A
25.8	Nominal cross-sectional area of supply cords according to table 11; rated current (A); cross-sectional area (mm²)	For adaptor 0.75 mm ²	Р
CC	Supply cord of submersible pumps intended for outdoor use, other than class III pumps, have a length ≥ 10 m (IEC 60335-2-41)	CCS	N/A
	Supply cord of submersible pumps, other than class III pumps, aquarium pumps and table fountain pumps, have a length of at least 3 m in excess of the maximum operating depth marked on the pump (IEC 60335-2-41/A2)		N/A
25.9	Supply cord not in contact with sharp points or edges		N/A
25.10	Green/yellow core for earthing purposes in Class I appliance	Class II appliance	N/A
25.11	Conductors of supply cords not consolidated by lead-tin soldering where they are subject to contact pressure, unless	acc.	N/A
	clamping means so constructed that there is no risk of bad contacts due to cold flow of the solder	20	Р
25.12	Moulding the cord to part of the enclosure does not damage the insulation of the supply cord		N/A
25.13	Inlet opening so shaped as to prevent damage to the supply cord	_	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 45 of 91

Report No. RI /2015/40056

2015/400
Verdict
N/A
N/A
N/A
_
N/A
P
Р
Р
Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 46 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
25.16	Cord anchorages for type X attachments constru	icted and located so that:	_
	- replacement of the cord is easily possible		N/A
E	- it is clear how the relief from strain and the prevention of twisting are obtained	- CO	N/A
	- they are suitable for different types of cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
-6	- at least one part of the cord anchorage securely fixed to the appliance, unless part of a specially prepared cord		N/A
CE	- screws which have to be operated when replacing the cord do not fix any other component, if applicable	186	N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for Class 0, 0I and I appliances: they are of insulating material or are provided with an insulating lining, unless a failure of the insulation of the cord does not make accessible metal parts live		N/A
C	- for Class II appliances: they are of insulating material, or if of metal, they are insulated from accessible metal parts by supplementary insulation	cG	N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals	3)	N/A
25.17	Adequate cord anchorages for type Y and Z attachment	For adaptor	Р
25.18	Cord anchorages only accessible with the aid of a tool, or		N/A
	so constructed that the cord can only be fitted with the aid of a tool	For adaptor	Р
		ı	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 47 of 91

Report No. RL/2015/40056

	Page 47 of 91	Report No. RL/2	013/400
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used	C.F.	N/A
25.20	Conductors of the supply cord for type Y and Z attachment adequately additionally insulated	0)9	N/A
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed to permit checking of conductors with respect to correct positioning and connection before fitting any cover, no risk of damage to the conductors when fitting the cover, no contact with accessible metal parts if a conductor becomes loose, etc.		N/A
CE	For portable appliances, the uninsulated end of a conductor prevented from any contact with accessible metal parts, unless the end of the cord is such that the conductors are unlikely to slip free	SGS	N/A
25.22	Appliance inlet:		
	- live parts not accessible during insertion or removal		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
C	- is not for cold conditions if temp. rise of external metal parts exceeds 75 K, unless the supply cord is not likely to touch such metal parts	CAR.	N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except as specified		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with the standard is impaired when they are disconnected		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 48 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
25.25	Dimensions of pins compatible with the dimensions of the relevant socket-outlet. Dimensions of pins and engagement face in accordance with the relevant plug in IEC 60083	- CCS	N/A

26	TERMINALS FOR EXTERNAL CONDUCTORS		_
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		Р
	Terminals only accessible after removal of a non-detachable cover		Р
	However, earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for connection to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless the connections are soldered	Sti	N/A
	Screws and nuts serve only to clamp supply conductors, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone		N/A
	Soldering alone used, barriers provided, clearances and creepage distances satisfactory if the conductor becomes free at the soldered joint	Sur	N/A
26.3	Terminals for type X attachment and for connection to fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor		N/A
	Terminals for type X attachment and those for co- fixed that when tightening or loosening the clamp		_

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 49 of 91

Report No. RL/2015/40056

	Page 49 of 91	Report No. RL/2015/40	<i>J</i> U.
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark Verd	lict
	- the terminal does not loosen	N/A	4
AC.	- internal wiring is not subjected to stress	N/A	4
EE	- clearances and creepage distances are not reduced below the values in 29	N/A	4
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified. Nominal diameter of thread (mm); screw category; torque (Nm):	N/A	Α
26.4	Terminals for type X attachment, except those with a specially prepared cord, and those for connection to fixed wiring, no special preparation of conductors required, and so constructed or placed that conductors prevented from slipping out	N/A	Α
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard	N/A	4
	Stranded conductor test, 8 mm insulation removed	N/A	4
	No contact between live parts and accessible metal parts and, for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only	N/A	Α
26.6	Terminals for type X attachment and for connection to fixed wiring suitable for connection of conductors with required cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm²):	N/A	4
	Terminals only suitable for a specially prepared cord	N/A	4
26.7	Terminals for type X attachment accessible after removal of a cover or part of the enclosure	N/A	4
26.8	Terminals for the connection to fixed wiring, including the earthing terminal, located close to each other	N/A	4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 50 of 91

Report No. RL/2015/40056

	IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict	
26.9	Terminals of the pillar type constructed and located as specified		N/A	
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless conductors ends fitted with a device suitable for screw terminals	SG	N/A	
	Pull test of 5 N to the connection		N/A	
26.11	For type Y and Z attachment: soldered, welded, crimped and similar connections may be used		Р	
	For Class II appliances: the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A	
cc	For Class II appliances: soldering, welding or crimping alone used, barriers provided, clearances and creepage distances satisfactory if the conductor becomes free	CCC	N/A	

27	PROVISION FOR EARTHING		_
27.1	Accessible metal parts of Class 0I and I appliances, permanently and reliably connected to an earthing terminal or contact of the appliance inlet		N/A
	Earthing terminals not connected to neutral terminal		N/A
	Class 0, II and III appliance have no provision for earthing	Class II appliance	Р
C	Safety extra-low voltage circuits not earthed, unless protective extra-low voltage circuits		N/A
27.2	Clamping means adequately secured against accidental loosening	3)	N/A
	Terminals used for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm², and		N/A
	do not provide earthing continuity between different parts of the appliance		N/A
	Conductors cannot be loosened without the aid of a tool		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to

Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 51 of 91

Report No. RL/2015/40056

	Page 51 01 91	Report No. RL/2015/4005
	IEC 60335-2-41	
Clause	Requirement + Test	Result - Remark Verdict
27.3	For detachable parts that are plugged into another part of the appliance, and having an earth connection, the earth connection made before and separated after current-carrying connections when removing the part	N/A
	For appliances with supply cord, current- carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage	N/A
27.4	No risk of corrosion resulting from contact between metal of earthing terminal and other metal	N/A
	Adequate resistance to corrosion of coated or uncoated parts providing earthing continuity, other than parts of a metal frame or enclosure	N/A
C	Parts of steel providing earthing continuity provided at the essential areas with an electroplated coating, thickness at least 5 µm	N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure	N/A
	In case of aluminium alloys precautions taken to avoid risk of corrosion	N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts	N/A
C	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided that clearances of basic insulation are based on the rated voltage of the appliance	N/A
	Resistance not exceeding 0,1 Ω at the specified low-resistance test	N/A
27.6	The printed conductors of printed circuit boards shall not be used to provide earthing continuity in hand-held appliances.	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



	Page 52 of 91	Report No. RL	/2015/40056
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
CS	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit	GG.	N/A
28	SCREWS AND CONNECTIONS		_
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		Р
	Screws not of soft metal liable to creep, such as zinc or aluminium		Р
	Diameter of screws of insulating material min. 3 mm		N/A
E	Screws of insulating material not used for any electrical connection or connections providing earthing continuity	C C C	N/A
	Screws used for electrical connections or connections providing earthing continuity screw into metal		N/A
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N/A
	Type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw can impair basic insulation		N/A
	For screws and nuts; test as specified	(see appended table)	N/A
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure not transmitted through insulating material liable to shrink or distort, unless shrinkage or distortion compensated		N/A
	This requirement does not apply to electrical connections in circuits carrying a current not		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號

exceeding 0.5A



Page 53 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
SIS	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread	56	N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threade connections providing earthing continuity provide disturb the connection:		_
	- in normal use,		N/A
aC	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or	550	N/A
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
	Thread-cutting and space-threaded screws may be used in connections providing earthing continuity, provided unnecessary to disturb the connection and at least two screws are used for each connection		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity	Su	N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if subjected to torsion		N/A

29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION	_
----	---	---

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 54 of 91

Report No. RL/2015/40056

ent + Test			
	ŀ	Result - Remark	Verdict
			Р
e microenvironment (Typo asic insulation (Type 2), a	e 1) or to annex J	5	N/A
	degree 1		N/A
			N/A
aking into account the ra r the overvoltage categor	ted impulse		Р
		GE	N/A
movement of the parts of the clearances for rated of 1500V and above are in and the impulse voltage te	or during impulse ncreased by		N/A
oltage test not applicable			_
e microenvironment is po	llution		N/A
	class 01	aC.	N/A
s are in overvoltage cate	gory II		Р
r basic insulation of class			N/A
ion degree 3 is applicable	Э		N/A
	on and		Р
	es, creepage distances are withstand electrical stressings used on printed circuite microenvironment (Type asic insulation (Type 2), a servironment is pollution of a coating and the coating are the overvoltage categors. Insulation and functional in oly with the implulse voltage and the impulse voltage test not applicable as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and a servironment is possible as are in overvoltage categors. Insulation of class 0 and	es, creepage distances and solid withstand electrical stress gs used on printed circuits boards to emicroenvironment (Type 1) or to asic insulation (Type 2), annex J	es, creepage distances and solid withstand electrical stress gs used on printed circuits boards to emicroenvironment (Type 1) or to asic insulation (Type 2), annex J environment is pollution degree 1 ee 1 coating nce or creepage distance ents under Type 2 coating es not less than the values specified in aking into account the rated impulse rate overvoltage categories of table should be a count of the parts or during the clearances for rated impulse of 1500V and above are increased by the timpulse voltage test is not should be a count to the parts or during the clearances for rated impulse of 1500V and above are increased by the timpulse voltage test is not should be a count of class 0 and class 01 sets are in overvoltage category II sets less than specified in table 16 not or basic insulation of class 0 and class ces, ion degree 3 is applicable ce is checked by inspection and

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 55 of 91

Report No. RL/2015/40056

	Page 55 of 91	Report No. RL/2015/400
	IEC 60335-2-41	
Clause	Requirement + Test	Result - Remark Verdie
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1mm if the microenvironment is pollution degree 1	N/A
	Lacquered conductors of windings considered to be bare conductors	N/A
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16	N/A
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, but using the next higher step for rated impulse voltage	P
29.1.4	For functional insulation, the values of table 16 are applicable, unless	P
	the appliance complies with clause 19 with the functional insulation short-circuited	N/A
	Lacquered conductors of windings considered to be bare conductors	N/A
	However, clearances at crossover points are not measured	N/A
	Clearance between surfaces of PTC heating elements may be reduced to 1mm	N/A
29.1.5	Appliances having higher working voltage than rated voltage, the voltage used for determining clearances from table 16 is the sum of the rated impulse voltage and the difference between the peak value of the working voltage and the peak value of the rated voltage	N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 56 of 91

Report No. RL/2015/40056

	Page 56 of 91	Report No. RL/2015/40
	IEC 60335-2-41	
Clause	Requirement + Test	Result - Remark Verdi
e C	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation based on the working voltage used as the rated voltage in table 15	P
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree	P
	Pollution degree 2 applies, unless	Р
	precautions taken to protect the insulation; pollution degree 1	N/A
	insulation subjected to conductive pollution; pollution degree 3	N/A
	Compliance is checked by inspection and measurements as specified	Р
29.2.1	Creepage distances of basic insulation not less than specified in table 17	P
	For pollution degree 1, creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14	N/A
29.2.2	Creepage distances of supplementary insulation at least as specified for basic insulation in table 17	N/A
29.2.3	Creepage distances of reinforced insulation at least double as specified for basic insulation in table 17	P
29.2.4	Creepage distances of functional insulation not less than specified in table 18	C J P
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited	N/A
29.3	Supplementary and reinforced insulation having adequate thickness, or a sufficient number of layers, to withstand the electrical stresses	Р
	Compliance checked by:	_
	- measurement, in accordance with 29.3.1, or	P

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 57 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	- an electric strength test in accordance with 29.3.2, or		N/A
GE	The third dashed item replaced by: - an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and, for accessible reinforced insulation consisting of a single layer, measurement in accordance with 29.3.Z1	SG	N/A
29.3.1	Supplementary insulation having a thickness of at least 1 mm		N/A
	Reinforced insulation having a thickness of at least 2 mm		Р
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation	a C	N/A
	Supplementary insulation consisting of at least 2 layers	GUS	N/A
	Reinforced insulation consisting of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of Clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.Z1	For accessible reinforced insulation consisting of a single layer, the thickness of the layer complies with table Z1; rated voltage (V); overvoltage category; thickness (mm):	SE	N/A
30	RESISTANCE TO HEAT AND FIRE		_
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

or reinforced insulation,

thermoplastic material providing supplementary

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termis and Conditions for Electronic Documents at www.sgs.com/termis_e-accument.nm. Attention is drawn to the limitation of lability, indemnification and jurisdiction sates delined inferior. Any noticer or this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號

Ρ



Page 58 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	sufficiently resistant to heat		Р
AC.	Ball-pressure test according to IEC 60695-10-2		Р
G PO	External parts: at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C)	Enclosure: 75 °C	Р
	Parts supporting live parts: at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125°C, whichever is the higher; temperature (°C)	Transformer bobbin: 125 °C	Р
	Parts of thermoplastic material providing supplementary or reinforced insulation, 25°C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C):		N/A
30.2	Parts of non-metallic material adequately resistant to ignition and spread of fire	- CG	Р
	This requirement does not apply to decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		Р
	Compliance checked by the test of 30.2.1. In addition:		Р
	- attended appliances, 30.2.2 applies		N/A
	- unattended appliances, 30.2.3 applies		Р
	Appliances for remote operation, 30.2.3 applies		Р
06	Base material of printed circuit board, 30.2.4 applies	66	Р
	Clause 30.2.3 is not applicable to submersible pumps, if their live parts are completely contained within an enclosure of metal or porcelain and the instructions state that the pump shall be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA. (IEC 60335-2-41/A2)		N/A
30.2.1	Glow-wire test of IEC 60695-2-11 at 550 °C, unless		Р

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 59 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	the material is classified at least HB40 according to IEC 60695-11-10	-6	N/A
	Parts for which the glow-wire test cannot be carried out meet the requirements in ISO9772 for category HBF material	SE	N/A
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and parts of non-metallic material within a distance of 3mm of such connections, are subjected to the glow-wire test of IEC 60695-2-11.		N/A
	The glow-wire test is not carried out on parts of r glow-wire flammability index according to IEC 60		_
-6	-750°C, for connections carrying a current exceeding 0,5A during normal operation	ac	N/A
	-650°C, for other connections	6/14	N/A
6	Test as specified for an interposed shielding material	3)	N/A
	When the glow-wire test of IEC 60695-2-11 is ca are:	rried out, the temperatures	_
	-750°C, for connections carrying a current exceeding 0,5A during normal operation		N/A
	-650°C, for other connections		N/A
	Test not applicable to conditions as specified		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2	60	Р
	Tests not applicable to conditions as specified	6	P
30.2.3.1	Parts of insulating material supporting connections carrying a current exceeding 0.2A during normal operation, and		N/A
	parts of non-metallic material within a distance of 3mm,		N/A
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850°C	_	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 60 of 91

Report No. RL/2015/40056

	Page 60 of 91	Report No. RL/	2013/4003
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
es	Glow-wire test not carried out on parts of material classified as having a glow-wire flammability index of at least 850°C according to IEC 60695-2-12	-cG	N/A
	Glow-wire test not carried out on small parts that comply with the needle-flame test of Annex E or on small parts of material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	Test as specified for an interposed shielding material		N/A
30.2.3.2	Parts of non-metallic material supporting current-carrying connections, and		N/A
	parts of non-metallic material within a distance of 3mm,		N/A
aC	subjected to glow-wire test of IEC 60695-2-11		N/A
1515	Test not carried out on material having a glowwire ignition temperature according to IEC 60695-2-13 of at least:	Su	N/A
	-775°C, for connections carrying a current exceeding 0,2A during normal operation		N/A
	-675°C, for other connections		N/A
	When the glow-wire test of IEC 60695-2-11 is caare:	rried out, the temperatures	_
	-750°C, for connections carrying a current exceeding 0,2A during normal operation		Р
-6	-650°C, for other connections	600	N/A
167	Parts that during the test produce a flame persisting longer than 2 s, tested as specified	GU	N/A
	If a flame persists longer than 2 s during the test, parts above the connection, as specified, subjected to the needle-flame test of annex E, unless		N/A
	the material is classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to needle-flame test of annex E		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



	Page 61 of 91	Report N	o. RL/2015/40056
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	Test not applicable to conditions as specified		N/A
04	DESIGNATION TO DIJUTING		
31	RESISTANCE TO RUSTING		
61	Relevant ferrous parts adequately protected against rusting		Р
32	RADIATION, TOXICITY AND SIMILAR HAZA	ARDS	_
	Appliance shall not emit harmful radiation,		Р

present a toxic or similar hazard due to their

Relevant tests specified in part 2, if necessary

operation in normal use

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

N/A



Page 62 of 91

Report No. RL/2015/40056

		<u>'</u>		
	IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict	
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		-	
	Description of routine tests to be carried the manufacturer	out by	N/A	

В	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		_
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance	N.	/A
	This annex does not apply to battery chargers	N.	/A
3.1.9	Appliance operated under the following condition	S: -	_
00	-the appliance, supplied by its fully charged battery, operated as specified in relevant part 2	N.	/A
	-the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate	N.	/A
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2	N.	/A
	If the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed	N.	/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable	N.	/A
5.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances	N.	/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals	N.	/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 63 of 91

Report No. RI /2015/40056

	Page 6	33 of 91 Report No	o. RL/2015/4005
	IEC 603	335-2-41	
Clause	Requirement + Test	Result - Remark	Verdict
7.12	The instructions for appliances incorp batteries intended to be replaced by the includes required information		N/A
1012	Details about how to remove batteries containing materials hazardous to the environment given		N/A
7.15	Markings placed on the part of the ap connected to the supply mains	pliance	N/A
8.2	Appliances having batteries that according the instruction may be replaced by the need only have basic insulation betwee parts and the inner surface of the batter compartment	e user een live	N/A
aC	If the appliance can be operated with batteries, double or reinforced insulating required		N/A
11.7	The battery is charged for the period	described	N/A
19.1	Appliances subjected to tests of 19.10 and 19.103	01, 19.102	N/A
19.101	Appliances supplied at rated voltage f the battery being continually charged	or 168 h,	N/A
19.102	Short-circuiting of the terminals of the being fully charged, for appliances had batteries that can be removed without of a tool	aving	N/A
19.103	Appliances having batteries replaceal user supplied at rated voltage under roperation with the battery removed or position allowed by the construction	normal	N/A
21.101	Appliances having pins for insertion ir outlets have adequate mechanical str checked according to procedure 2 of 32	ength,	N/A
	Part of the appliance incorporating the procedure 2, of IEC 60068-2-32, the r		, _
	- 100, the mass of part does not exce	ed 250 g	N/A
	- 50, the mass of part exceeds 250 g		N/A
			<u> </u>

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 64 of 91

Report No. RL/2015/40056

	Page 64 of 91	Report No. RL/20	715/4003
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met	-6	N/A
22.3	Appliances having pins for insertion into socket- outlets tested as fully assembled as possible	a Carr	N/A
25.13	An additional lining or bushing not required for interconnection cords operating at safety extralow voltage		N/A
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A
	For other parts, 30.2.2 applies		N/A
С	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		_
CE	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding	Slis	N/A
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		_
	Applicable to appliances having motors that incorporate thermal motor protectors		N/A
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		_
C	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:	CF3	N/A
7	Severities		_
	The duration of application of the test flame is $30 \text{ s} \pm 1 \text{ s}$		N/A
9	Test procedure		
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1		N/A
9.2	The first paragraph does not apply		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 65 of 91

Report No. RI /2015/40056

	rage 03 01 91	Report No. RE/2	-013/4003
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
-6	If possible, the flame is applied at least 10 mm from a corner		N/A
9.3	The test is carried out on one specimen		N/A
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		_
	The duration of burning not exceeding 30 s		N
	However, for printed circuit boards, the duration of burning not exceeding 15 s		N

F	ANNEX F (NORMATIVE) CAPACITORS	- C
G	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:	N/A
1.5	Terminology	_
1.5.3	Class X capacitors tested according to subclass X2	N/A
1.5.4	This subclause is applicable	N/A
1.6	Marking	_
	Items a) and b) are applicable	N/A
3.4	Approval testing	
3.4.3.2	Table II is applicable as described	N/A
4.1	Visual examination and check of dimensions	-
	This subclause is applicable	N/A
4.2	Electrical tests	_
4.2.1	This subclause is applicable	N/A
4.2.5	This subclause is applicable	N/A
4.2.5.2	Only table IX is applicable	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 66 of 91

Report No. RL/2015/40056

	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict		
	Values for test A apply		N/A		
26	However, for capacitors in heating appliances the values for test B or C apply	000	N/A		
4.12	Damp heat, steady state	SU	_		
	This subclause is applicable		N/A		
	Only insulation resistance and voltage proof are checked		N/A		
4.13	Impulse voltage				
	This subclause is applicable				
4.14	Endurance				
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 applicable		N/A		
4.14.7	Only insulation resistance and voltage proof are checked	Clis	N/A		
	Visual examination, no visible damage		N/A		
4.17	Passive flammability test		_		
	This subclause is applicable				
4.18	Active flammability test	•	_		
	This subclause is applicable		N/A		

G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		_
C	The following modifications to this standard are applicable for safety isolating transformers:	C C C	Р
7	Marking and instructions		
7.1	Transformers for specific use marked with:		_
	-name, trademark or identification mark of the manufacturer or responsible vendor	Ming Qun Electric Co., Ltd.	Р
	-model or type reference	D2412 GH	Р
17	Overload protection of transformers and associa	ated circuits	_

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 67 of 91

Report No. RL/2015/40056

	rage or or or	(topolition (ta)	_0.0,.000
	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1	-6	Р
22	Construction		5)-
6	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable	270	Р
29	Clearances, creepage distances and solid insula	ation	_
29.1, 29.2 and 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		Р

Н	ANNEX H (NORMATIVE) SWITCHES	
	Switches comply with the following clauses of IEC 61058-1, as modified:	N/A
06	-The tests of IEC 61058-1 carried out under the conditions occurring in the appliance	N/A
	-Before being tested, switches are operated 20 times without load	N/A
8	Marking and documentation	_
	Switches are not required to be marked	N/A
	However, switches that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference	N/A
13	Mechanism	
0	The tests may be carried out on a separate sample	N/A
15	Insulation resistance and dielectric strength	_
15.1	Not applicable	N/A
15.2	Not applicable	N/A
15.3	Applicable for full disconnection and micro-disconnection	N/A
17	Endurance	_
	Compliance is checked on three separate appliances or switches	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 68 of 91

Report No. RL/2015/40056

		-1			
	IEC 60335-2-41				
Clause	Requirement + Test	Result - Remark	Verdict		
aC	For 17.2.4.4, the number of cycles is 10 000, unless otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335	-00	N/A		
	Switches for operation under no load and which can be operated only by a tool and switches operated by hand that are interlocked so that they cannot be operated under load, are not subjected to the tests	Ser	N/A		
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A		
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A		
-6	Temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1		N/A		
20	Clearances, creepage distances, solid insulation board assemblies	and coatings of rigid printed			
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and microdisconnection, as stated in table 24		N/A		

I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE	
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:	N/A
8	Protection against access to live parts	_
8.1	Metal parts of the motor are considered to be bare live parts	N/A
11	Heating	_
11.3	Temperature rise of the body of the motor is determined instead of the temperature rise of the windings	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 69 of 91

Report No. RL/2015/40056

	IEC 60335-2-41			
Clause	Requirement + Test	Result - Remark	Verdict	
11.8	Temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N/A	
16	Leakage current and electric strength		_	
16.3	Insulation between live parts of the motor and its other metal parts not subjected to the test		N/A	
19	Abnormal operation		_	
19.1	The tests of 19.7 to 19.9 not carried out			
19.101	Appliance operated at rated voltage with each of the following fault conditions:		_	
-6	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A	
1	- short circuit of each diode of the rectifier		N/A	
()	- open circuit of the supply to the motor		N/A	
	- open circuit of any parallel resistor, the motor being in operation		N/A	
	Only one fault simulated at a time, the tests carried out consecutively		N/A	
22	Construction		_	
22.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A	
164	Compliance checked by the tests specified for double and reinforced insulation	B	N/A	

J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS	_
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:	N/A
5.7	Conditioning of the test specimens	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 70 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdict
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		40 -
	The test is carried out at -25°C		N/A
5.7.3	Rapid change of temperature		_
	Severity 1 is specified		N/A
5.9	Additional tests	•	_
-	This subclause is not applicable		N/A

K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		_
	The information on overvoltage categories is extracted from IEC 60664-1		Р
	Overvoltage category is a numeral defining a transient overvoltage condition	200	Р
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		Р
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies	SG	N/A
3)>	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 71 of 91

Report No. RI /2015/40056

		Page 71 of 91	Report No. RL/2	2015/4005
	IE	EC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUI CREEPAGE DISTANCES	REMENT OF CL	EARANCES AND	_
E L	Sequences for the determination and creepage distances	n of clearances	1850	P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE			_
	The information on pollution deg extracted from IEC 60664-1	rees is		Р
	Pollution			_
	The microenvironment determin pollution on the insulation, taking the microenvironment			Р
Et	Means may be provided to reduct the insulation by effective enclosed		COS	P
	Minimum clearances specified w may be present in the microenvi			Р
	Degrees of pollution in the micro	environment		_
	For evaluating creepage distance microenvironment are established		degrees of pollution in the	_
	- pollution degree 1: no pollution non-conductive pollution occurs has no influence			N/A
C	- pollution degree 2: only non-co- pollution occurs, except that occurs temporary conductivity caused be is to be expected	asionally a	CG.	P
	- pollution degree 3: conductive or dry non-conductive pollution of becomes conductive due to confis to be expected	occurs that		N/A
	- pollution degree 4: the pollution persistent conductivity caused b dust or by rain or snow			N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 72 of 91

Report No. RL/2015/40056

Clause Requirement + Test Result - Remark Verdi			IEC 60335-2-41		
	Clause	Requirement + Test		Result - Remark	Verdict

N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		-
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:	SG	P
7	Test apparatus		_
7.3	Test solutions		_
	Test solution A is used		Р
10	Determination of proof tracking index (PTI)		_
10.1	Procedure		_
	The proof voltage is 100V, 175V, 400V or 600V:		Р
-	The last paragraph of Clause 3 applies	ac	Р
	The test is carried out on five specimens	CHIC	Р
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N/A
10.2	Report		_
	The report stating if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A

0	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		_
	Description of tests for determination of resistance to heat and fire	a Clark	Р

P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WDaE	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 73 of 91

Report No. RL/2015/40056

	IEC 60335-2-41		
Clause	Requirement + Test	Result - Remark	Verdic
CC	Modifications may also be applied to class 1 ap voltage exceeding 150V, intended to be used in damp equable climate and that are marked Wd a supply mains that excludes the protective ear	acountries having a warm aE, if liable to be connected to	-
5	General conditions for the tests		
5.7	The ambient temperature for the tests of Clauses 11 and 13 is 40 $^{+3}/_{0}$		N/A
7	Marking and instructions		
7.1	The appliance marked with the letters WDaE		N/A
7.12	The instructions state that the appliance is to be supplied through a RCD having a rated residua operating current not exceeding 30 mA		N/A
CC	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries	CG.	N/A
11	Heating		
11.8	The values of Table 3 are reduced by 15 K		N/A
13	Leakage current and electric strength at operation	ng temperature	
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15	Moisture resistance		
15.3	The value of t is 37 °C		N/A
16	Leakage current and electric strength	-6	_
16.2	The leakage current for class I appliances not exceeding 0,5 mA	CF	N/A
19	Abnormal operation		_
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE)		

Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS	_
	Description of tests for appliances incorporating electronic circuits	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 74 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION	-06	_
Circ	Software evaluated in accordance with the follow IEC 60730-1, as modified	ring clauses of Annex H of	_
H.2	Definitions		_
	Only definitions H.2.16 to H.2.20 applicable		N/A
H.7	Information		_
	Only footnotes 12) to 18) of Table 7.2, as modified, applicable		N/A
H.11.12	Controls using software	_	
ac	All the subclauses of H.11.12, as modified, except H.11.12.6 and H.11.12.6.1, applicable	-00	N/A
H.11.12.7	Delete text	a Collins	N/A
H.11.12.7. 1	For appliances using software class C having a single channel with self-test and monitoring structure, the manufacturer provides the measures necessary to address the fault/errors in safety related segments and data		N/A
H.11.12.8	Software fault/error detection occurs before compliance with 19.13 of IEC 60335-1 is impaired		N/A
H.11.12.8. 1	Replace text		N/A
H.11.12.1 3	Software and safety related hardware under its control initializes and terminates before compliance with 19.13 of IEC 60335-1 is impaired	SG	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 75 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

10.1	TABLE: Power input deviation					N/A
Input devia	ation of/at:	P rated (W)	P measured (W)	dP	Required dP	Remark
Test mode	l with CR-005					
24 Vdc		22	22.7	+0.7	+4.4	Pump
Test mode	l with CR-008	•				
24 Vdc		22	22.5	+0.5	+4.4	Pump
			10		1	

10.2	TABLE: Curi	rent deviation				Р
Current deviation of/at:		I rated (A)	I measured (A)	dl	Required dI	Remark
Test mode	l with CR-009					
220 Vac		0.2	0.12	-0.08	+0.04	Adaptor
240 Vac		0.2	0.13	-0.07	+0.04	Adaptor
Test mode	l with CR-008					
220 Vac		0.2	0.1	-0.1	+0.04	Adaptor
240 Vac		0.2	0.12	-0.08	+0.04	Adaptor

11.8	TABLE: Heating test, thermocou	ples			Р
	Test voltage (V)	:	206.8 V	ac (19.1 W)	_
	Ambient (°C)	:		55	_
Thermoco	ouple locations	dT (K)	Max. dT (k	()
Power Co	ord	18.	7	20	
Transform	ner Coil	17.	2	50	
PCB near	r D	43.	5	See Clause	30
Inside end	closure	21.	4	See Clause	30
Outside e	enclosure	14.	3	30	
Motor		20.	5	85	
Test Wall		1.3	3	35	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 76 of 91

Report No. RL/2015/40056

F					<u> </u>	
		IEC	60335-2-41			
Clause	Requirement + Test		2	Result - Ren	nark	Verdict
Test floor			2.0		35	

11.8	1.8 TABLE: Heating test, thermocouples				P
	Test voltage (V)	age (V)::		/ac (25.2 W)	_
	Ambient (°C)	:		23.3	_
Thermo	ocouple locations	dT (K)	Max. dT (I	<)
Power (Cord	18.	9	20	
Transfo	rmer Coil	18.	7	50	
PCB ne	ear D	47.	1	See Clause	30
Inside e	enclosure	23.	6	See Clause	30
Outside	enclosure	15.	1	30	
Motor		23.	1	85	
Test Wa	all	0.5	5	35	
Test flo	or	1.4		35	

13.2	TABLE: Leakage current			Р
	Heating appliances: 1.15 x rated input:			
	Motor-operated and combined appliances: 1.06 x rated voltage:	254.4 Vac for adaptor		
Leakage current between		I (mA)	Max. allowe	ed I (mA)
L/N to pla	stic enclosure with metal foil	0.01	0.2	5

13.3	TABLE: Electric strength		Р
Test volt	age applied between:	Voltage (V)	Breakdown (Yes/No)
Pump co	nductors to enclosure with metal foil	500 Vac	No
L/N to pla	astic parts with metal foil	3000 Vac	No

14	TABLE: Transient overvoltages	N/A	
----	-------------------------------	-----	--

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 77 of 91

Report No. RL/2015/40056

Clause Requirement + Test Result - Remark	Verdict

Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)
1					10

16.2	TABLE: Leakage current			Р
	Single phase appliances: 1.06 x rated voltage:	254.4 Vac for	adaptor	_
	Three phase appliances 1.06 x rated voltage divided by √3:			_
Leakage current between		I (mA)	Max. allowe	ed I (mA)
L/N to plastic enclosure with metal foil		0.01	0.2	5

16.3 TABLE: Electric strength		P
Test voltage applied between:	Voltage (V)	Breakdown (Yes/No)
Pump conductors to enclosure with metal foil	500 Vac	No
L/N to plastic parts with metal foil	3000 Vac	No

17 TABLE: Overload protection, temperature rise					
Temperature rise of part/at: T (°C) Max. T				(°C)	
Transforme	r output short	129.9	195	5	
After 6 min	thermal link was operated				

19.7	TABLE: Abnormal operation, locked rotor/moving parts					
16	Test voltage (V)		:	:	<u> </u>	
	Ambient, t ₁ (°C) : 55					_
	Ambient, t ₂ (°C) 55				_	
Temperature of winding		R ₁ (Ω)	R ₂ (Ω)	dT (K)	T (°C)	Max. T (°C)
Motor winding				51.5	76.0	185
Untill temperatures are stable.						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 78 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

19.9	19.9 TABLE: Abnormal operation, running overload						
Test voltage (V):							_
1510	Ambient, t ₁ (°C):						
	Ambient, t ₂ (°C):						_
Temperati	ure of winding	R ₁ (Ω)	R ₂ (Ω)	dT (K)	T (°C)	Ма	x. T (°C)

19.11.2 TABLE: Abnormal operation, Fault Conditions of Electronic Circuit					
Parts/ Con	nponents	Test condition	Result		
Diode		Short-circuited	Unit shut down; damage; no ha		

19.13 TABLE: Abnormal operati	TABLE: Abnormal operation, temperature rises					
Thermocouple locations	dT (K)	Max. dT (K)				

24.1	TAE	BLE: Components	ac				Р
Object / part No.		Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) conform	
Fused plug		BO Luo Chang Le Metal Plastic Co., Ltd.	HO-100	250 Vac, 13 A,	BS 1363-1	BSI KM 60229	
- Fuse		DEL International Industrial(U.K.) Limited	DISSMANN	250 Vac, 13 A	BS 1362	AST 997	A
Power cord		I-Sheng Electric Wire & Cable Co., Ltd.	H03VV-F	2x0.75 mm ²	DIN VDE 0281-5	VDE 1037	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 79 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

Adaptor	Ming Qun Electric Co., Ltd.	D2412 GH	I/P: 220 – 240 Vac, 50–60 Hz, 0.2 A O/P: 24 Vdc, 1.2A	IEC 60335-1	Tested as a part of the appliance
- Winding	Ta Win Industries(M) SDN BHD	UEW	Class 130	IEC 60335-1	Tested with the appliance UL E152187
- Bobbin	E I Dupont DE Nemours & Co., Ltd.	101	PA, V-2	IEC 60335-1	Tested with the appliance UL E41938
- Insulating Tape	Chyun Yih Tape Co., Ltd.	P210	130 °C	IEC 60335-1	Tested with the appliance UL E81174
- Enclosure	GE Plastics Global Products	SE100X	V-1	IEC 60335-1	Tested with the appliance UL E121562
- Thermal link	Tamura Corporation	K13F	250 Vac, 1 A, T _f =130 °C	EN 60691	VDE 40016219
- PCB	Eternal Chemical Co., Ltd.	ETL-204	V-0	IEC 60335-1	Tested with the appliance UL E95862
Pump motor	ZeeVak	PM-07	24 Vdc	IEC 60335-1	Tested with the appliance
- Winding	Cheng Du South-west Electric Co., Ltd.	PEW	Class 155	IEC 60335-1	Tested with the appliance UL E178366

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 80 of 91

Report No. RL/2015/40056

			IEC 60	335-2-41					
Clause Requirement + Test Result - Remark									
- Enclosure	N	E I Dupont De Nemours & Co., nc.	70G33L	PA66, HB		IEC 60335-1	the appl	ed with iance	

28.1	TABLE: Threa	aded part torque test			N/A
Threaded part identification		Diameter of thread (mm)	Column number (I, II, or III)	Applied torque	e (Nm)

29.1	TABLE: CI	E: Clearances											
	Overvoltage	e category	:	II									
PPO			Туре с	of insulation:		ed E L	2						
Rated impulse voltage (V)	Min. cl (mm)	Basic	Functional	Supplementar y	Reinforce d	Verdict / Re	mark						
330	0,5*												
500	0,5*	Х	X			Р							
800	0,5*		CALC.		Х	Р							
1 500	0,5*/**												
2 500	1,5**	Х	Х			Р							
4 000	3,0**				Х	Р							
6 000	5,5**					CH F I	7						
8 000	8,0**					0							
10 000	11,0**												

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termis and Conditions for Electronic Documents at www.sgs.com/termis_e-accument.nm. Attention is drawn to the limitation of lability, indemnification and jurisdiction sates delined inferior. Any noticer or this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號

^{*)} The value is increased to 0,8mm for pollution degree 3
*) If the construction is affected by wear, distortion, movement of the parts or during assembly, the value is increased by 0,5 mm



Page 81 of 91

Report No. RL/2015/40056

		IEC 60335-2-41		
Clause	Requirement + Test		Result - Remark	Verdict

Control of the Contro	TABLE insulat		epage	distanc	es, basic	, supp	lement	tary and i	einfo	rced		Р
Working vo	Oltage Creepage distance (mm) Pollution degree											
		1	2				3			Type of insulation		
			M	aterial g	roup	Ma	aterial o	group				
				U	IIIa/IIIb		Ш	IIIa/IIIb	B*)	S*)	R*)	Verdict
≤50		0,2	0,6	0,9	<u>1,2</u>	1,5	1,7	1,9	Χ	_		Р
≤50		0,2	0,6	0,9	<u>1,2</u>	1,5	1,7	1,9		Χ		Р
≤50		0,4	1,2	1,8	<u>2,4</u>	3,0	3,4	3,8		_	Χ	Р
>50 and <	≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4	1		1	N/A
>50 and <	≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4			<u> </u>	N/A
>50 and <	≤125	0,6	1,6	2,2	3,0	3,8	4,2	4,8		_		N/A
>125 and	≤250	0,6	1,3	1,8	<u>2,5</u>	3,2	3,6	4,0	Χ	_		Р
>125 and	≤250	0,6	1,3	1,8	<u>2,5</u>	3,2	3,6	4,0	_	Χ		Р
>125 and	≤250	1,2	2,6	3,6	<u>5,0</u>	6,4	7,2	8,0	_		Х	Р
>250 and	≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3				N/A
>250 and	≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	_		_	N/A
>250 and	≤400	2,0	4,0	5,6	8,0	10,0	11,2	12,6		_		N/A
>400 and	≤500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	1	4	1	N/A
>400 and	≤500	1,3	2,5	3,6	5,0	6,3	7,1	8,0			-	N/A
>400 and	≤500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	_	_		N/A
>500 and	≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		_	_	N/A
>500 and	≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	_		_	N/A
>500 and	≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	_	_		N/A
>800 and ≤	≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5			_	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 82 of 91

Report No. RL/2015/40056

				A		25 2 44			ТОР	011110.	TKL/ZC	715/40050
Clause	Requirer	mant J	Toet		IEC 603	35-2-41		Result - Rema	ərk			Verdict
Clause	Requirer	HEIR T	1621					Vesuit - IVeille	air			veruici
>800 and	≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	_		_	N/A
>800 and	≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	_	1	C	N/A
>1000 and	l ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	(0	1	1	N/A
>1000 and	l ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	-			N/A
>1000 and	l ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0				N/A
>1250 and	I ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		_	_	N/A
>1250 and	l ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0			_	N/A
>1250 and	l ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0				N/A
>1600 and	l ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0			_	N/A
>1600 and	l ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0				N/A
>1600 and	l ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0		(2)		N/A
>2000 and	l ≤2500	7,5	10,0	14,0	20,0	25, 0	28,0	32,0		1	<u> </u>	N/A
>2000 and	l ≤2500	7,5	10,0	14,0	20,0	25, 0	28,0	32,0				N/A
>2000 and	l ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0		—		N/A
>2500 and	l ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		_		N/A
>2500 and	l ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0			_	N/A
>2500 and	l ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0		_		N/A
>3200 and	I ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		_	_	N/A
>3200 and	l ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0				N/A
>3200 and	I ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	16	4		N/A
>4000 and	l ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		H		N/A
>4000 and	l ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0				N/A
>4000 and	l ≤5000	32,0	40,0	56,0	80,0	100,0	112,	0 126,0				N/A
>5000 and	l ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		_		N/A
>5000 and	l ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	_			N/A
>5000 and	l ≤6300	40,0	50,0	72,0	100,0	126,0	142,	0 160,0		_		N/A
>6300 and	l ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		_		N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 83 of 91

Report No. RL/2015/40056

				IEC 60	335-2-41							
Requiren	nent +	Test					Res	sult - Rem	ark			Verdict
0008≥ I	25,0	32,0	45,0	63,0	80,0	90,	0	100,0	_		_	N/A
l ≤8000	50,0	64,0	90,0	126,0	160,0	180	0,0	200,0			6	N/A
≤10000	32,0	40,0	56,0	80,0	100,0	110	0,0	125,0	(0	1	1	N/A
≤10000	32,0	40,0	56,0	80,0	100,0	110	0,0	125,0	-			N/A
≤10000	64,0	80,0	112,0	160,0	200,0	220	0,0	250,0				N/A
	40,0	50,0	71,0	100,0	125,0	140	0,0	160,0		—		N/A
	40,0	50,0	71,0	100,0	125,0	140	0,0	160,0	_			N/A
	80,0	100,0	142,0	200,0	250,0	280),0	320,0	_	_		N/A
	I ≤8000 I ≤8000 ≤10000 ≤10000	1 ≤8000 25,0 1 ≤8000 50,0 ≤10000 32,0 ≤10000 64,0 and 40,0 00 40,0 and 40,0 and 40,0 and 80,0	1 ≤8000 50,0 64,0 ≤10000 32,0 40,0 ≤10000 32,0 40,0 ≤10000 64,0 80,0 and 00 40,0 50,0 and 00 40,0 50,0 and 80,0 100,0	$1 \le 8000$ $25,0$ $32,0$ $45,0$ $1 \le 8000$ $50,0$ $64,0$ $90,0$ ≤ 10000 $32,0$ $40,0$ $56,0$ ≤ 10000 $32,0$ $40,0$ $56,0$ ≤ 10000 $64,0$ $80,0$ $112,0$ and 00 $40,0$ $50,0$ $71,0$ and 00 $40,0$ $50,0$ $71,0$ and 00 $80,0$ $100,0$ $142,0$	Requirement + Test 1 ≤8000 25,0 32,0 45,0 63,0 1 ≤8000 50,0 64,0 90,0 126,0 ≤10000 32,0 40,0 56,0 80,0 ≤10000 32,0 40,0 56,0 80,0 ≤10000 64,0 80,0 112,0 160,0 and 40,0 50,0 71,0 100,0 and 40,0 50,0 71,0 100,0 and 80,0 100,0 142,0 200,0	Requirement + Test 1 ≤8000 25,0 32,0 45,0 63,0 80,0 1 ≤8000 50,0 64,0 90,0 126,0 160,0 ≤10000 32,0 40,0 56,0 80,0 100,0 ≤10000 32,0 40,0 56,0 80,0 100,0 ≤10000 64,0 80,0 112,0 160,0 200,0 and 40,0 50,0 71,0 100,0 125,0 and 40,0 50,0 71,0 100,0 125,0 and 80,0 100,0 142,0 200,0 250,0	$1 \le 8000$ $25,0$ $32,0$ $45,0$ $63,0$ $80,0$ $90,0$ $1 \le 8000$ $50,0$ $64,0$ $90,0$ $126,0$ $160,0$ $180,0$ ≤ 10000 $32,0$ $40,0$ $56,0$ $80,0$ $100,0$ $110,0$ ≤ 10000 $32,0$ $40,0$ $56,0$ $80,0$ $100,0$ $110,0$ ≤ 10000 $64,0$ $80,0$ $112,0$ $160,0$ $200,0$ $220,0$ and 000 $40,0$ $50,0$ $71,0$ $100,0$ $125,0$ $140,0$ and 000 $40,0$ $50,0$ $71,0$ $100,0$ $125,0$ $140,0$ and 000 $80,0$ $100,0$ $142,0$ $200,0$ $250,0$ $280,0$	Requirement + Test Res I ≤8000 25,0 32,0 45,0 63,0 80,0 90,0 I ≤8000 50,0 64,0 90,0 126,0 160,0 180,0 ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 ≤10000 64,0 80,0 112,0 160,0 200,0 220,0 and 00 40,0 50,0 71,0 100,0 125,0 140,0 and 00 40,0 50,0 71,0 100,0 125,0 140,0 and 80,0 100,0 142,0 200,0 250,0 280,0	Requirement + Test Result - Rem I ≤8000 25,0 32,0 45,0 63,0 80,0 90,0 100,0 I ≤8000 50,0 64,0 90,0 126,0 160,0 180,0 200,0 ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 ≤10000 64,0 80,0 112,0 160,0 200,0 220,0 250,0 and 00 40,0 50,0 71,0 100,0 125,0 140,0 160,0 and 00 40,0 50,0 71,0 100,0 125,0 140,0 160,0 and 80,0 100,0 142,0 200,0 250,0 280,0 320,0	Requirement + Test Result - Remark I ≤8000 25,0 32,0 45,0 63,0 80,0 90,0 100,0 — I ≤8000 50,0 64,0 90,0 126,0 160,0 180,0 200,0 — ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 — ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 — ≤10000 64,0 80,0 112,0 160,0 200,0 220,0 250,0 — and 00 40,0 50,0 71,0 100,0 125,0 140,0 160,0 — and 80,0 100,0 142,0 200,0 250,0 280,0 320,0 —	Requirement + Test Result - Remark I ≤8000 25,0 32,0 45,0 63,0 80,0 90,0 100,0 — I ≤8000 50,0 64,0 90,0 126,0 160,0 180,0 200,0 — ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 — ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 — ≤10000 64,0 80,0 112,0 160,0 200,0 220,0 250,0 — and 40,0 50,0 71,0 100,0 125,0 140,0 160,0 — and 40,0 50,0 71,0 100,0 125,0 140,0 160,0 — and 80,0 100,0 142,0 200,0 250,0 280,0 320,0 — —	Requirement + Test Result - Remark d ≤8000 25,0 32,0 45,0 63,0 80,0 90,0 100,0 — — d ≤8000 50,0 64,0 90,0 126,0 160,0 180,0 200,0 — — ≤10000 32,0 40,0 56,0 80,0 100,0 110,0 125,0 — — ≤10000 64,0 80,0 112,0 160,0 200,0 220,0 250,0 — — and 00 40,0 50,0 71,0 100,0 125,0 140,0 160,0 — — and 80,0 100,0 142,0 200,0 250,0 280,0 320,0 — —

29.2 TABI	E: Cree	epage o	distanc	es, funct	ional i	nsulati	on	Р
Working voltage (V)	e		Cre P	\				
	1		2 3					
		Ma	aterial g	group	Ma	aterial g	group	
		I	11	Illa/IIIb	I	II	IIIa/IIIb	Verdict / Remark
≤50	0,2	0,6	0,8	1,1	1,4	1,6	1,8	Р
>50 and ≤125	0,3	0,7	1,0	1,4	1,8	2,0	2,2	N/A
>125 and ≤250	0,4	1,0	1,4	2,0	2,5	2,8	3,2	Р
>250 and ≤400	0,8	1,6	2,2	3,2	4,0	4,5	5,0	N/A
>400 and ≤500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A
>1000 and ≤125	0 3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A
>1250 and ≤160	6,3	9,0	12,5	16,0	18,0	20,0	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 84 of 91

Report No. RL/2015/40056

					. ago .	54 01 51		10001110: 112/2010/4000		
				0	IEC 60	335-2-41				
Clause	Requirer	ment +	Test				Re	esult - Rem	ark	Verdict
						_				
>1600 and	≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A	
>2000 and	≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A	
>2500 and	≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A	
>3200 and	≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A	
>4000 and	≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A	
>5000 and	≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A	
>6300 and	≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A	
>8000 and	≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A	
>10000 ≤1250		40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 85 of 91 Report No. RL/2015/40056 IEC 60335-2-41 Requirement + Test Result - Remark Clause Verdict

30	TABLE: RESIST	BLE: RESISTANCE TO HEAT, FIRE AND TRACKING												
		Туре	Ball pressure test				Trackin		Glow	wire te	est		Needl	
'	Manufacturer		75°C	cl. 11 +40°C	125°C	cl. 19 +25°C	g test [CTI/ PTI]	GWT 550°C	GWT 650°C	GWT 750° C	GWFI 850° C	GWIT	e- flame test	Ver dict
Plastic enclosure	See table 24.1	See table 24.1	—	1.24 mm		_	_	Х		701	_	—		Р
Transformer bobbin	See table 24.1	See table 24.1	_	_	0.95 mm		_	-	_	Х	_	_	_	Р
РСВ	See table 24.1	See table 24.1		ā(0.89 mm	_	_			Х	_		-	Р

¹⁾ Flame persisting longer than 2 s

supplementary information:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not expect in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

台灣檢驗科技股份有限公司

Member of SGS Group

²⁾ Surrounding parts are subjected to the needle-flame test of annex E ³⁾ These parts subjected to the needle-flame test of annex E

⁴⁾ Adjacent parts subjected to the needle-flame test of annex E

⁵⁾ Parts of material classified as V-0 or V-1

⁶⁾ Base material classified as V-0



Page 86 of 91

Report No. RL/2015/40056

PHOTO



Model: CR-009



Model: CR-009

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to

Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at <a href="www.sgs.com/rerms" e-occument.nem" and Conditions for Electronic Documents and www.sgs.com/rerms" e-occument.nem. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com




Page 87 of 91

Report No. RL/2015/40056

PHOTO

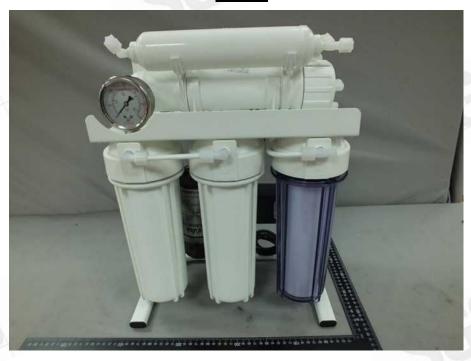

Model: CR-008

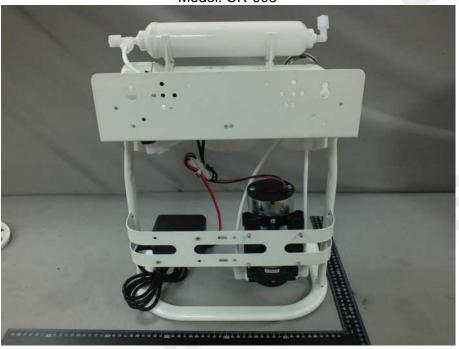

Model: CR-008

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at <a href="www.sgs.com/rerms" e-occument.nem" and Conditions for Electronic Documents and www.sgs.com/rerms" e-occument.nem. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488 t (886-2) 2299-3279 www.tw.sgs.com



Page 88 of 91 **PHOTO**

Report No. RL/2015/40056



Pump



Adaptor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to

Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 89 of 91

Report No. RL/2015/40056

PHOTO

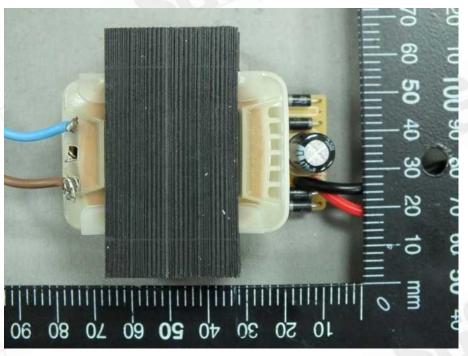

Adaptor



Adaptor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to

Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號



Page 90 of 91 **PHOTO**

Report No. RL/2015/40056



Thermal link



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at <a href="www.sgs.com/rerms" e-occument.nem" and Conditions for Electronic Documents and www.sgs.com/rerms" e-occument.nem. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488 t (886-2) 2299-3279 www.tw.sgs.com



Page 91 of 91 **PHOTO**

Report No. RL/2015/40056





-- End of Report --

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised Termins and Conditions for Electronic Documents at www.sgs.com/terming-e-occument.nem. Attention is drawn to the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.33,Wu Chyuan Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五權路 33 號